

DHI

HORIZONTAL MULTISTAGE - SURFACE PUMPS

- Hydraulic in AISI316 stainless steel
- High efficiency
- Quite operation
- Compact dimensions
- Sturdy and resistant
- High-efficiency motors according to EU(2019)/1781




DESCRIPTION

The DHI series horizontal multi-stage centrifugal pumps have the following advantages: high hydraulic performance regarding pressure and capacity. Minimum consumption of electricity. Extremely silent operation.

APPLICATIONS

- Handling of aggressive liquids
- Lifting and distribution of water in domestic systems in continuous or intermittent operation
- Pressurization systems
- Washing, garden irrigation, supply to fountains, transfers.

PERFORMANCE

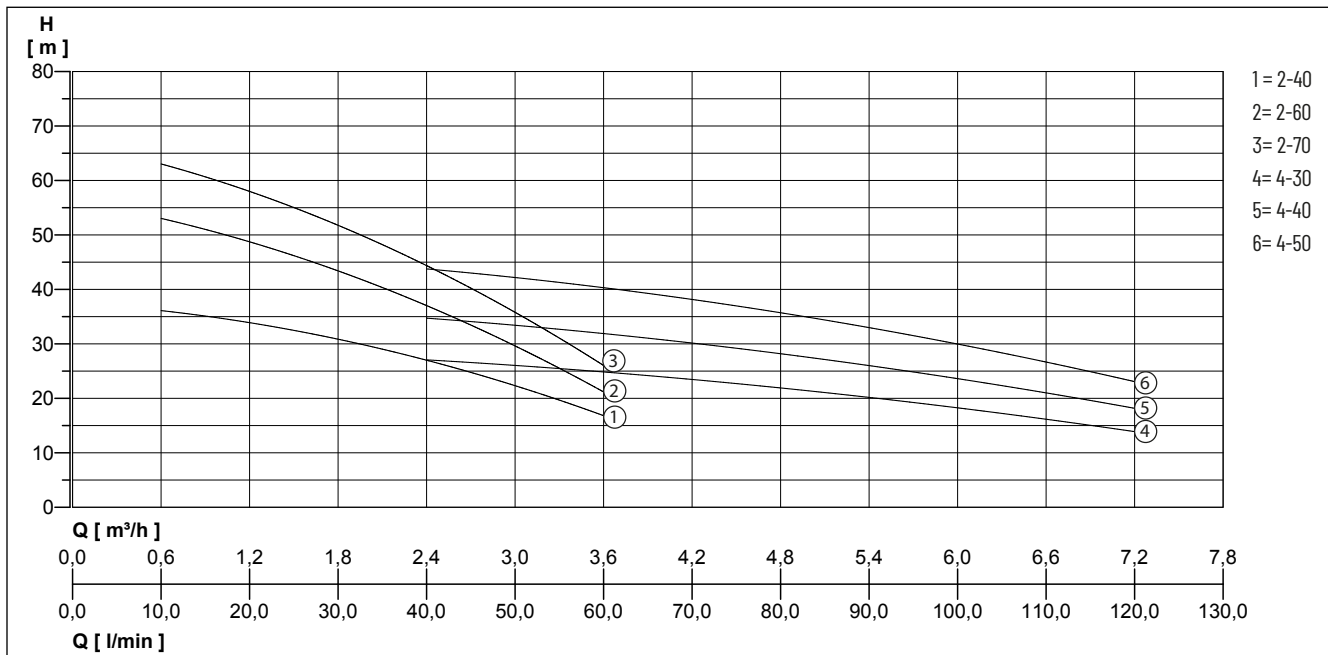

We reserve the right to change specifications without notice. Pump performance is subject to ISO 9906 ISO 9906:2012 - Grade 3B tolerances.

Type	Flow rate Q [m ³ /h]	0.6	1.2	1.8	2.4	3	3.6	4.8	6	7.2
DHI 2-40 M/T	Delivery head H [m]	36	34	31	27	22	17			
DHI 2-60 M/T		53	49	43	37	30	21			
DHI 2-70 M/T		63	58	52	44	36	26			
DHI 4-30 M/T					27	26	25	22	18	14
DHI 4-40 M/T					35	33	32	28	24	18
DHI 4-50 M/T					44	42	40	36	30	23